

# ZOOMLION

## TELESCOPIC BOOM LIFTS

### ZT26JE

Comply with CE/ANSI/CSA Standard

#### HIGHLIGHTS

- ▶ Offer industry-leading dual capacity of 300kg/454kg.
- ▶ Customized lithium-ion battery features green, environmental protection, low noise and zero-emission, ideal for construction and plant maintenance.
- ▶ 606Ah lithium-ion batteries combined with excellent energy management system provide longer running time.
- ▶ Low-temperature regenerative current control and power self-adaptive control effectively improve the safety of Li-ion battery and greatly prolong the batteries service life of at least 10%.
- ▶ Provide a variety of standard charging plugs and 10A/16A/32A multi-power optional charging mode featuring strong charging adaptability.
- ▶ Brand-new appearance with lightweight GFRP composite material hood and integrally formed coating features anti-corrosion, heat preservation, aging resistance and easy cleaning.
- ▶ Assembled large-opening component box, open-close hood, and a variety of reserved inspection holes easy to service.
- ▶ Comply with GB and CE standards, up to 20 safety inspection functions, safer and more stable.
- ▶ Larger working envelope with 28.7m work height and 22.1m horizontal outreach.
- ▶ Accurate and efficient traveling AC drive system provides strong power and stable control. Gradeability reaches 45% and motor is maintenance-free for its lifetime.
- ▶ Meet the requirements of standard container transportation.

#### FEATURES

##### Standard Features

|                          |                            |
|--------------------------|----------------------------|
| Horn                     | Auto-leveling system       |
| Proportional control     | On-board diagnostic system |
| All motion alarm         | Tilt protection system     |
| Flashing beacon          | Oscillating axle           |
| Self-closing entry gate  | Load sensing system        |
| Emergency descent system | 4.3' Led display           |
| Emergency stop button    | Swing-out engine tray      |

##### Accessories & Options

- ▶ Platform work light
- ▶ Secondary guarding system
- ▶ AC power to platform

## ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353680 0086(731)-88250971  
E-mail: awm@zoomlion.com

Add: ZOOMLION Wangcheng Industrial Park, Tengfei Road 997, Changsha, Hunan, China  
Web: www.en.zoomlion.com





# TELESCOPIC BOOM LIFTS

## ZT26JE

Comply with CE/ANSI/CSA Standard

| Model                                       | ZT26JE                  |           |
|---------------------------------------------|-------------------------|-----------|
|                                             | Imperial                | Metric    |
| Size                                        |                         |           |
| Work Height                                 | 94ft 2in                | 28.70m    |
| Platform Height                             | 87ft 7in                | 26.70m    |
| Horizontal Outreach                         | 82ft 6in                | 22.1m     |
| A - Stowed Length                           | 39ft 1in                | 11.91m    |
| B - Stowed Width                            | 8ft 2in                 | 2.49m     |
| C - Stowed Height                           | 9ft 3in                 | 2.82m     |
| D - Platform Length                         | 8ft                     | 2.44m     |
| E - Platform Width                          | 3ft                     | 0.91m     |
| Jib length                                  | 6ft                     | 1.83m     |
| F - Wheelbase                               | 9ft 2in                 | 2.80m     |
| Tread                                       | 6ft 11in                | 2.1m      |
| G - Ground Clearance                        | 1ft 4in                 | 0.41m     |
| Performance                                 |                         |           |
| Platform Capacity (Unrestricted/Restricted) | 660/1000lb              | 300/454kg |
| Drive Speed (Stowed)                        | 3.42mph                 | 5.5km/h   |
| Gradeability                                | 45%(24°)                |           |
| Turning Radius (Inside)                     | 10ft 2in                | 3.11m     |
| Turning Radius (Outside)                    | 20ft 3in                | 6.16m     |
| Turntable Swing                             | 360°continuous          |           |
| Platform Rotation                           | ±90°                    |           |
| Tail Swing                                  | 5ft 3in                 | 1.61m     |
| Jib Rotation                                | 130°(-55°~75°)          |           |
| Max. Wind Speed                             | 28mph                   | 12.5m/s   |
| Power                                       |                         |           |
| Battery                                     | 80V/606Ah               |           |
| Charger                                     | 6KW/80V                 |           |
| Drive Motor                                 | 5.2KW                   |           |
| Lifting Motor                               | 30KW                    |           |
| Auxiliary Power                             | 12V DC                  |           |
| Hydraulic Tank                              | 32 US gal               | 120L      |
| Tire                                        |                         |           |
| Type                                        | 15-625 Foam-filled tire |           |
| Weight                                      |                         |           |
| Gross                                       | 39462lb                 | 17900kg   |

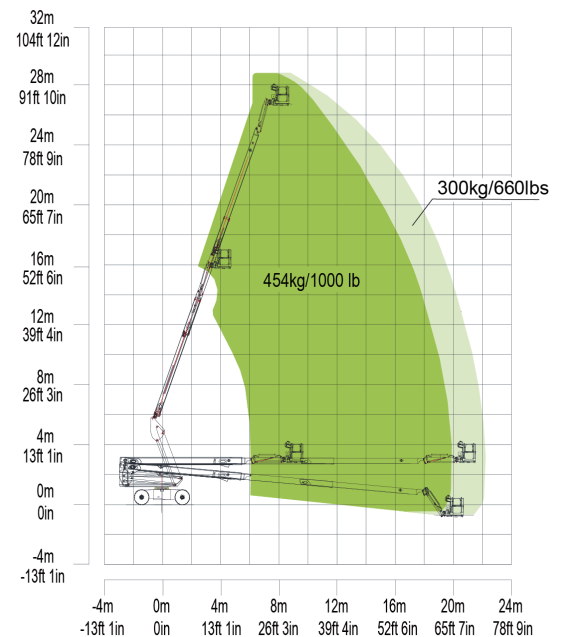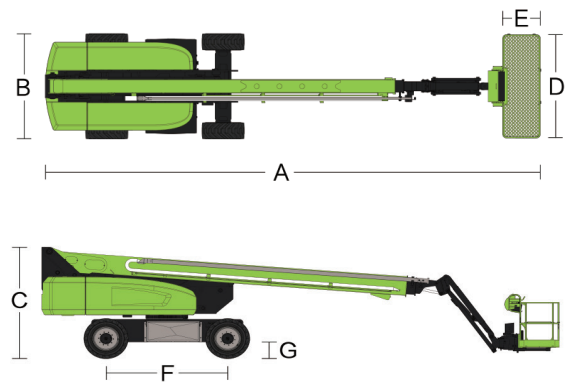

Range of Motion ZT26JE